



Magnetic Gauging Device

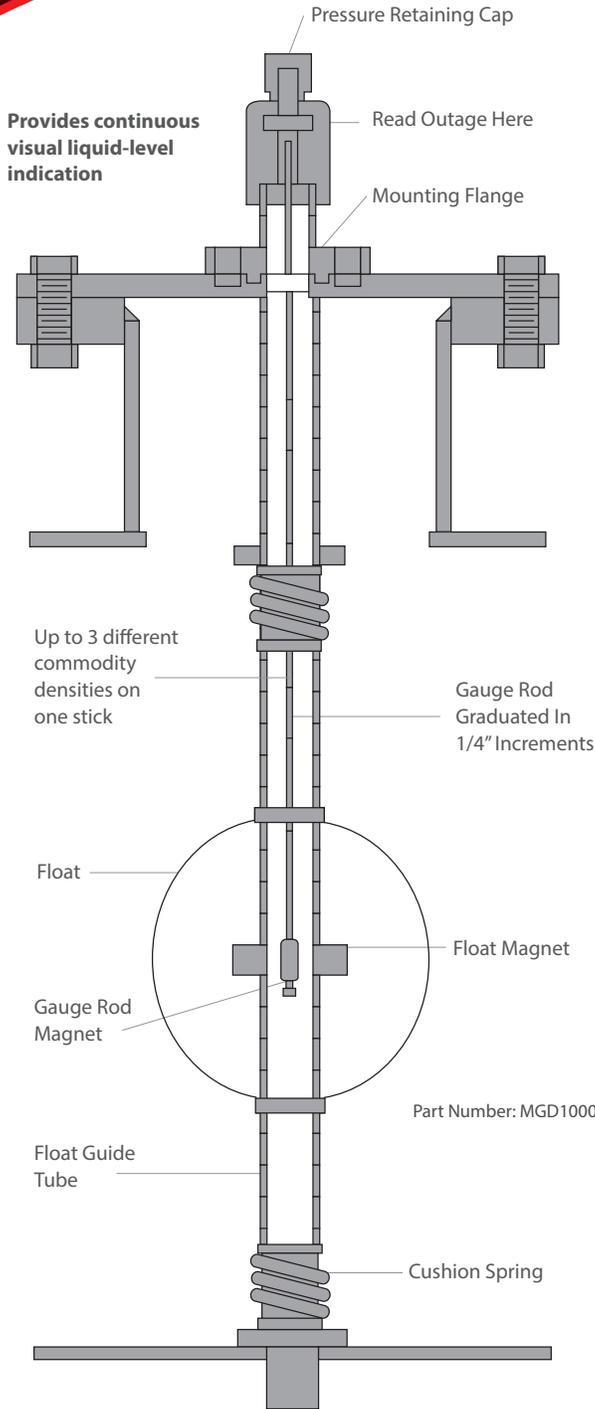

Advanced Design and Materials Ensure Durability and More Precise Readings.

- Hermetically sealed rod prevents bleeding of easy-to-read numbers.
- Thicker Teflon float-bushings for longer float life.
- Float rated for 600 psig.
- All wetted components are stainless steel.
- 8" float provides increased buoyancy.
- DOT/Coast Guard compliant; approved by ABS (American Bureau of Shipping).
- AAR Approved.

High-tech magnets are stronger and lighter, promoting durability and longevity. Standard float will accommodate commodity with specific gravity as low as .49. Single float systems available to accommodate specific gravity as low as .41. Tri-colored rod facilitates reading when car reaches critical fill level.

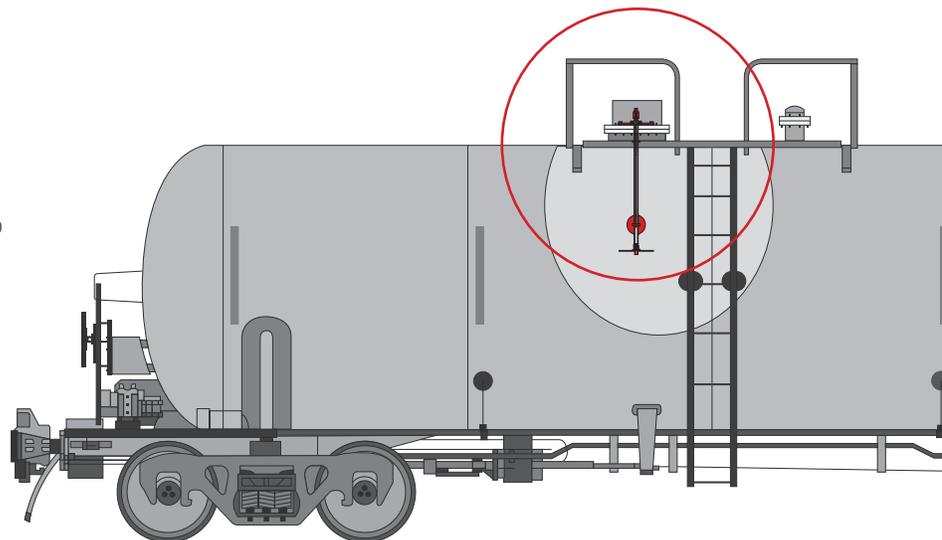

*Part numbers referenced are for images shown. Additional configurations are available.