


Vacuum Relief Valves

AAR Approved, Non-Cycling

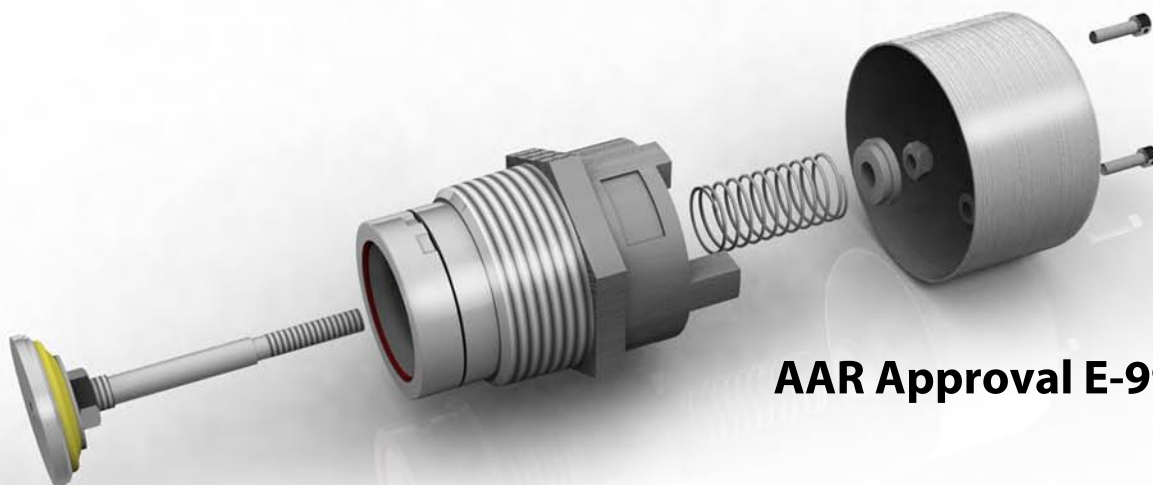

AAR Approval E-999001

- Independent cap and stem.
- 304 stainless steel construction.
- Hex design allows for simple installation.
- "Dual-Seal" ensures maximum protection.
- Available in 1 1/2" and 2 1/2" configurations.
- Both threaded and flanged configurations available.
- Full faced gasket prevents failure due to positive pressure.
- Tamper evident configuration available
- Available preset to AAR recommended pressure configuration; customer specified setup also available.
- Non-cycling design prevents valve from cycling and causing a product release in the case of a rollover or derailment.



Standard Gasket materials include:

- Buna-N
- Neoprene
- EPDM
- Viton A

Alternate material configurations are available.

Contact your Salco representative for more information.