
Safeguard ™ BOV Operating System

Patent Pending

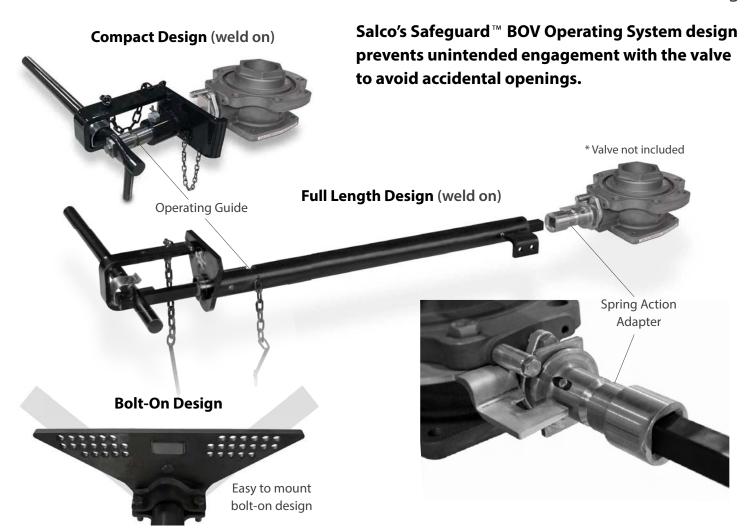

- Multiple seal hole provisions to ensure tamper evidence.
- Adapts to any bottom outlet valve configuration.
- For use on new cars or retrofit of existing cars.
- UHMWPE bearing surfaces promotes smooth operation.
- Can be applied to jacketed or non-jacketed cars.
- Spring action adapter ensures the handle only engages with operator contact.

- Customizable handle angle and bar length.
- Designed per AAR Task Force Docket T10.7.5.
- Handle locks in place when not in use; no need for removal and storage. Eliminates potential for loss or theft.
- Operating guide does not allow accidental disengagement of the handle until the valve is in the closed position.
- Bolt-on design requires no hot work; cars do not need to be cleaned or shopped prior to application.