

- 5. FASTEN ID PLATE WITH DRIVE SCREWS.
- 4. SEE DOCUMENT QAP5A-1 FOR MARKING PROCEDURE.
- MANUFACTURED DOMESTICALLY. (NY, NY).
- NEOPRENE DURO 60 ± 5 SHORE A.


- 2. AAR APPROVAL # PRD-162102.
- 3. GASKET MATERIAL IS BLACK GARLOCK #7986 PREMIUM GRADE

 \rightarrow


- NOTES: 1. CUSTOMERS RESPONSIBILITY FOR COMPATIBILITY OF COMMODITY.

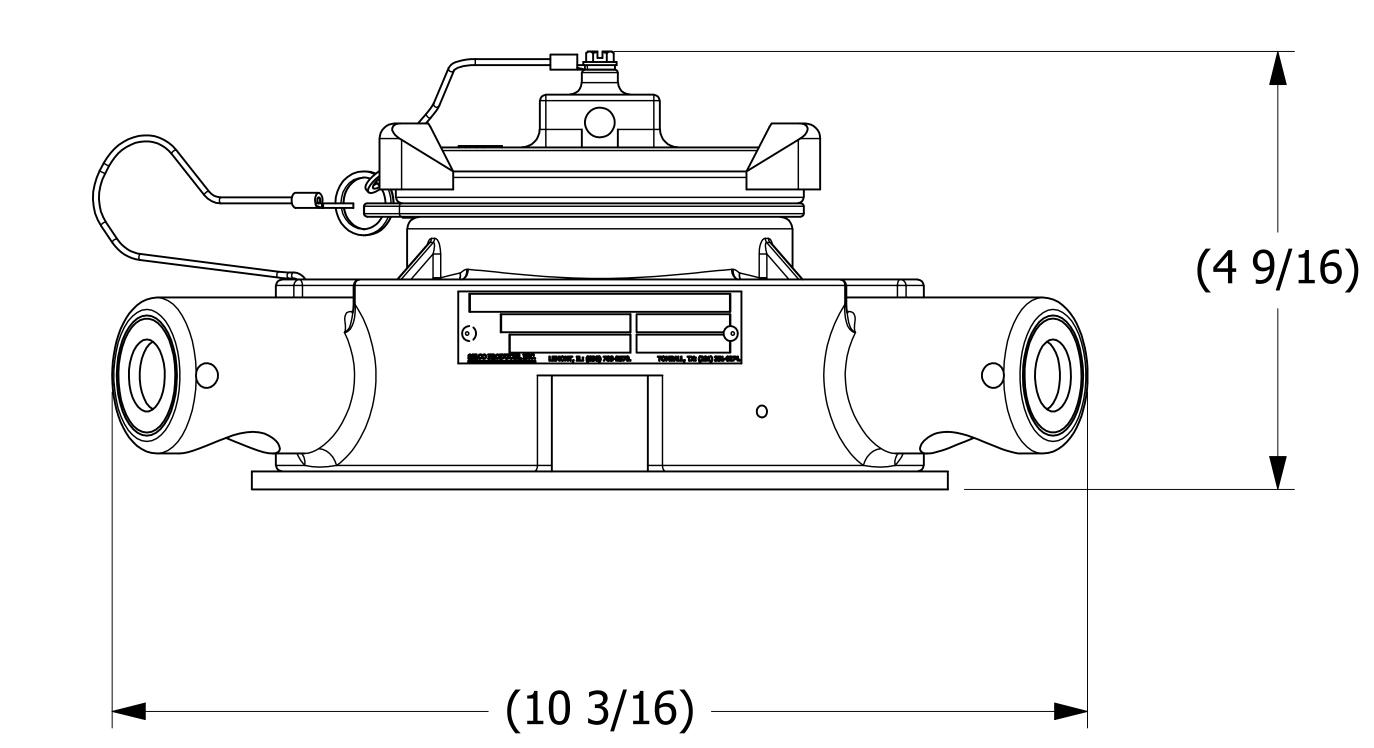


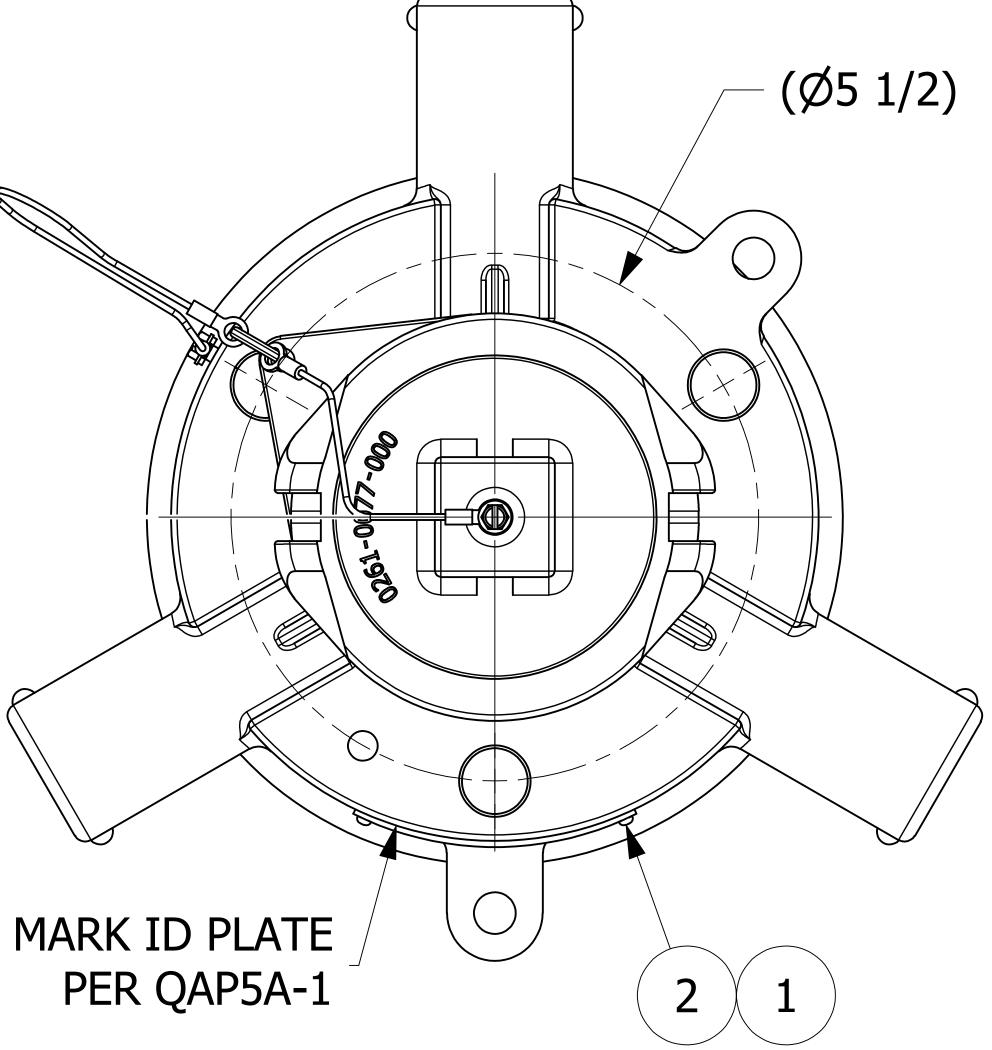

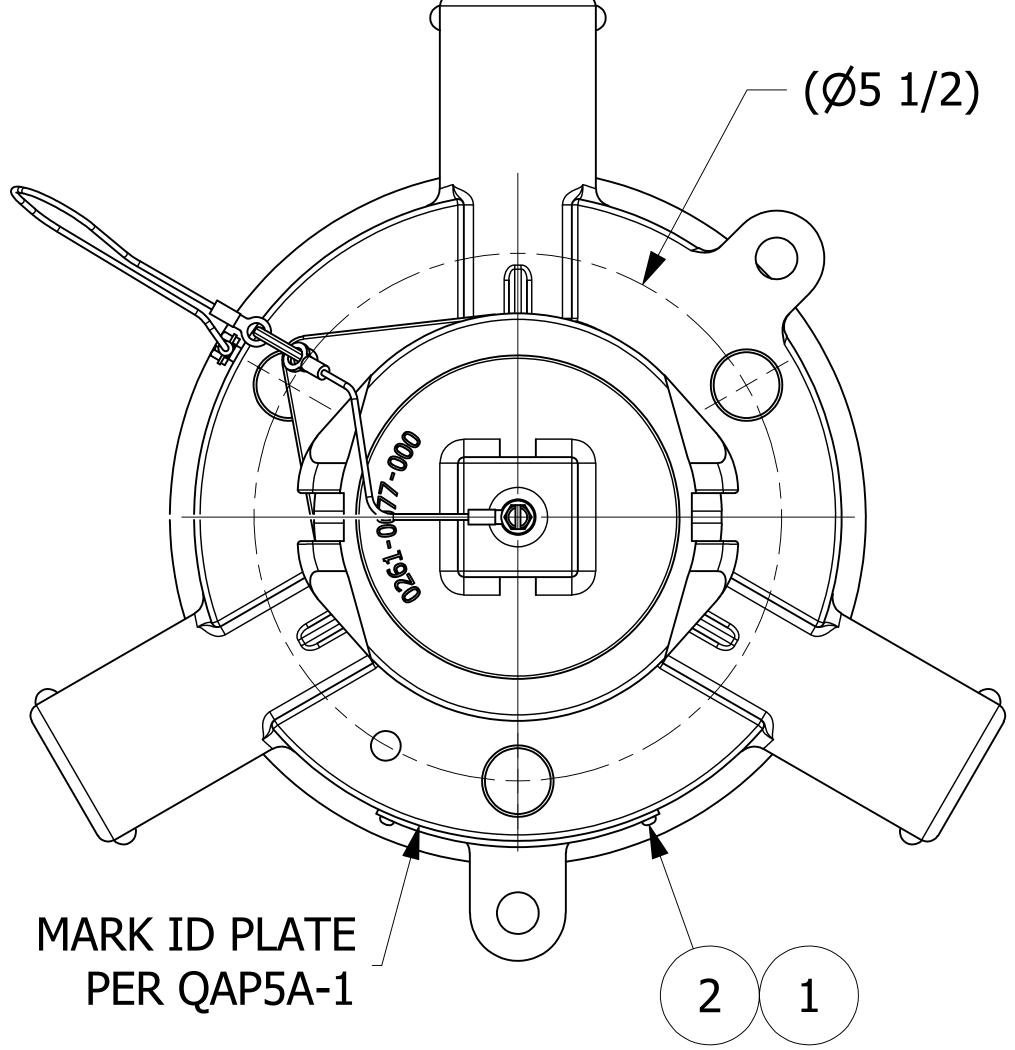

					2
NO	PART NAM	1E	PART#	REQ'D	
1 ID	PLATE 3" X 3/4"		A15152	.5	
2 DF	RIVE SCREW TYPE U	#2 X 1/8"	DR218	2	
3 QL	JICK INSPECT FLANC	GE GASKET	FG550205	1	BLACK GAR
4 QL	JICK INSPECT SAFET	TY VENT	QI261BSA	1	
5 QI	RETAINER GASKET		QI261G205	1	BLACK GAR
6 RL	JPTURE DISC (SOLD	SEPERATELY)			

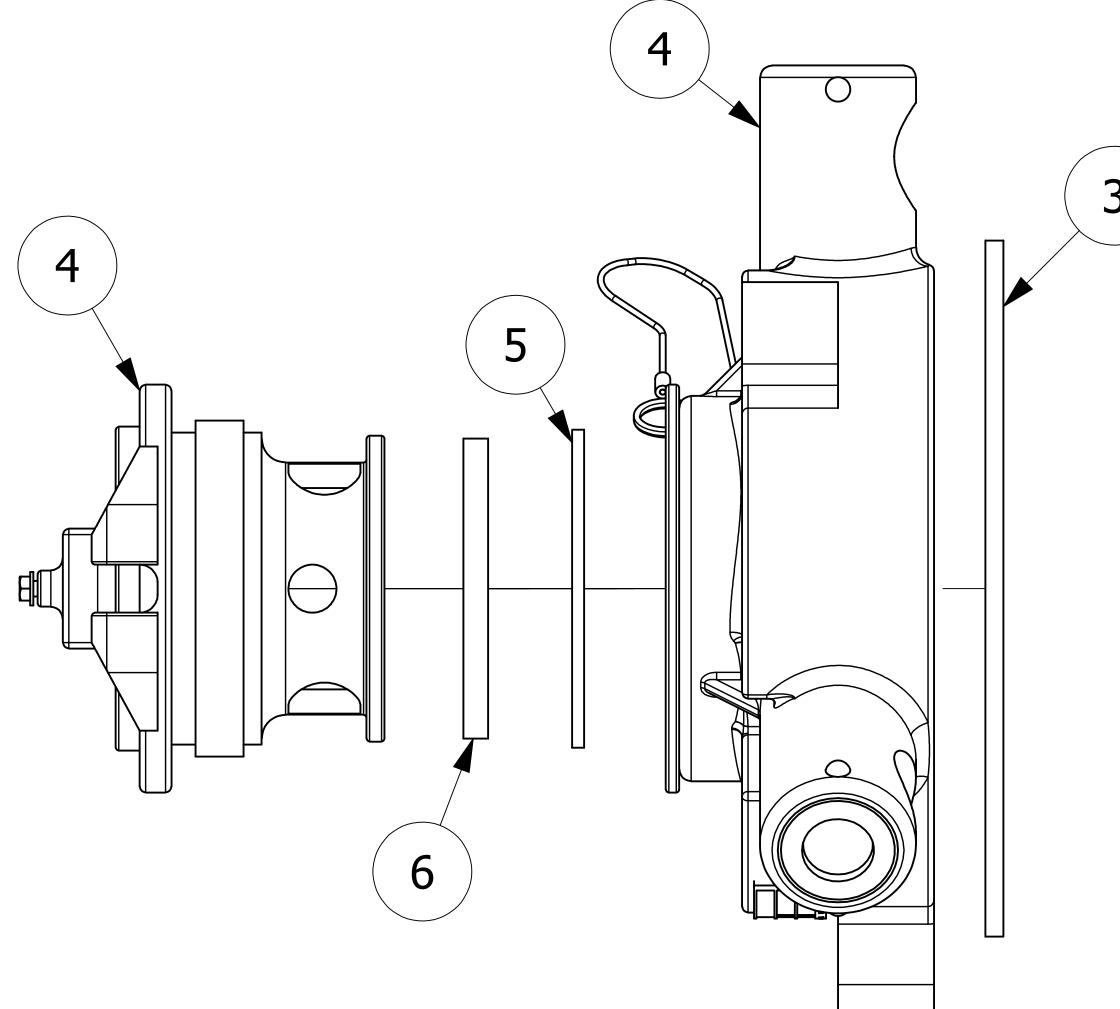

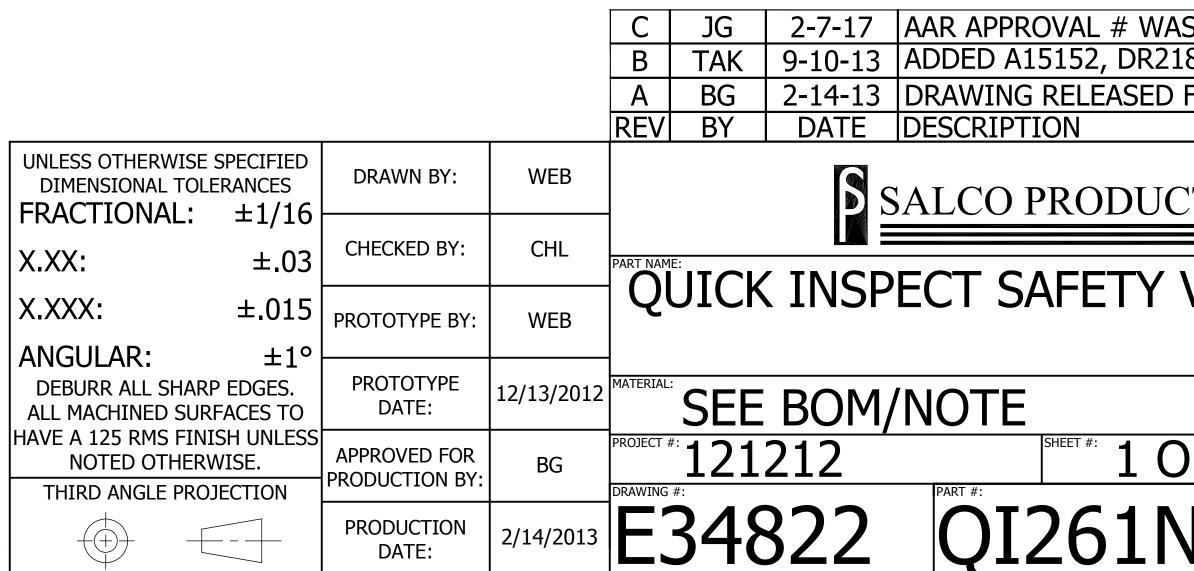

1	1
MATERIAL	
ALUMINUM	н
18-8 SS	
ARLOCK #7986 NEOPRENE	
BLACK NORYL	_
ARLOCK #7986 NEOPRENE	
	G
	F
3	
	_
	E
	┫
	D
	_
	с
AS SRD-063000	в
18 & QAP5A-1 NOTE FOR PRODUCTION	
CTS, INC.	
VENT	
	A
OF 1 SCALE: 1:1	
<u>NSPR205A</u>	
1	