


**NOTES:**

1. THIS ASSEMBLY IS AAR AND DOT APPROVED.
2. THREADS ARE 5 1/4"-4 UN-2B.
3. AAR APPROVAL # E-149523.
4. SPRAY WITH UDSA APPROVED WHITE MINERAL OIL OR VEGETABLE OIL AS A RUST INHIBITOR.

NO.	PART NAME	PART#	REQ'D	MATERIAL
1	HEX LOCK NUT 3/8"-16	EA111N	1	CS Z/P
2	FLAT WASHER 3/8" USS	KL103FW	2	CS Z/P
3	S-HOOK 3/8"X3 1/2"	SC38SH	1	CS Z/P
4	CHAIN LINKS 3/8"X15	SC4315C	1	AISI 1008 CS
5	LOCK RING	SSTCLR	1	304 SS
6	PLUG ASSEMBLY 1"	TC1PAH	1	CS
7	QUICK CONNECT CAP 4" THREADED	TE4ITDC	1	ASTM A395 GR. 60-40-18 DI
8	THREADED CAP GASKET 4"	TE4TDCG202	1	VITON GFLT-600S
9	HEX BOLT 3/8"-16X2 1/4"	VPHC20B	1	CS Z/P

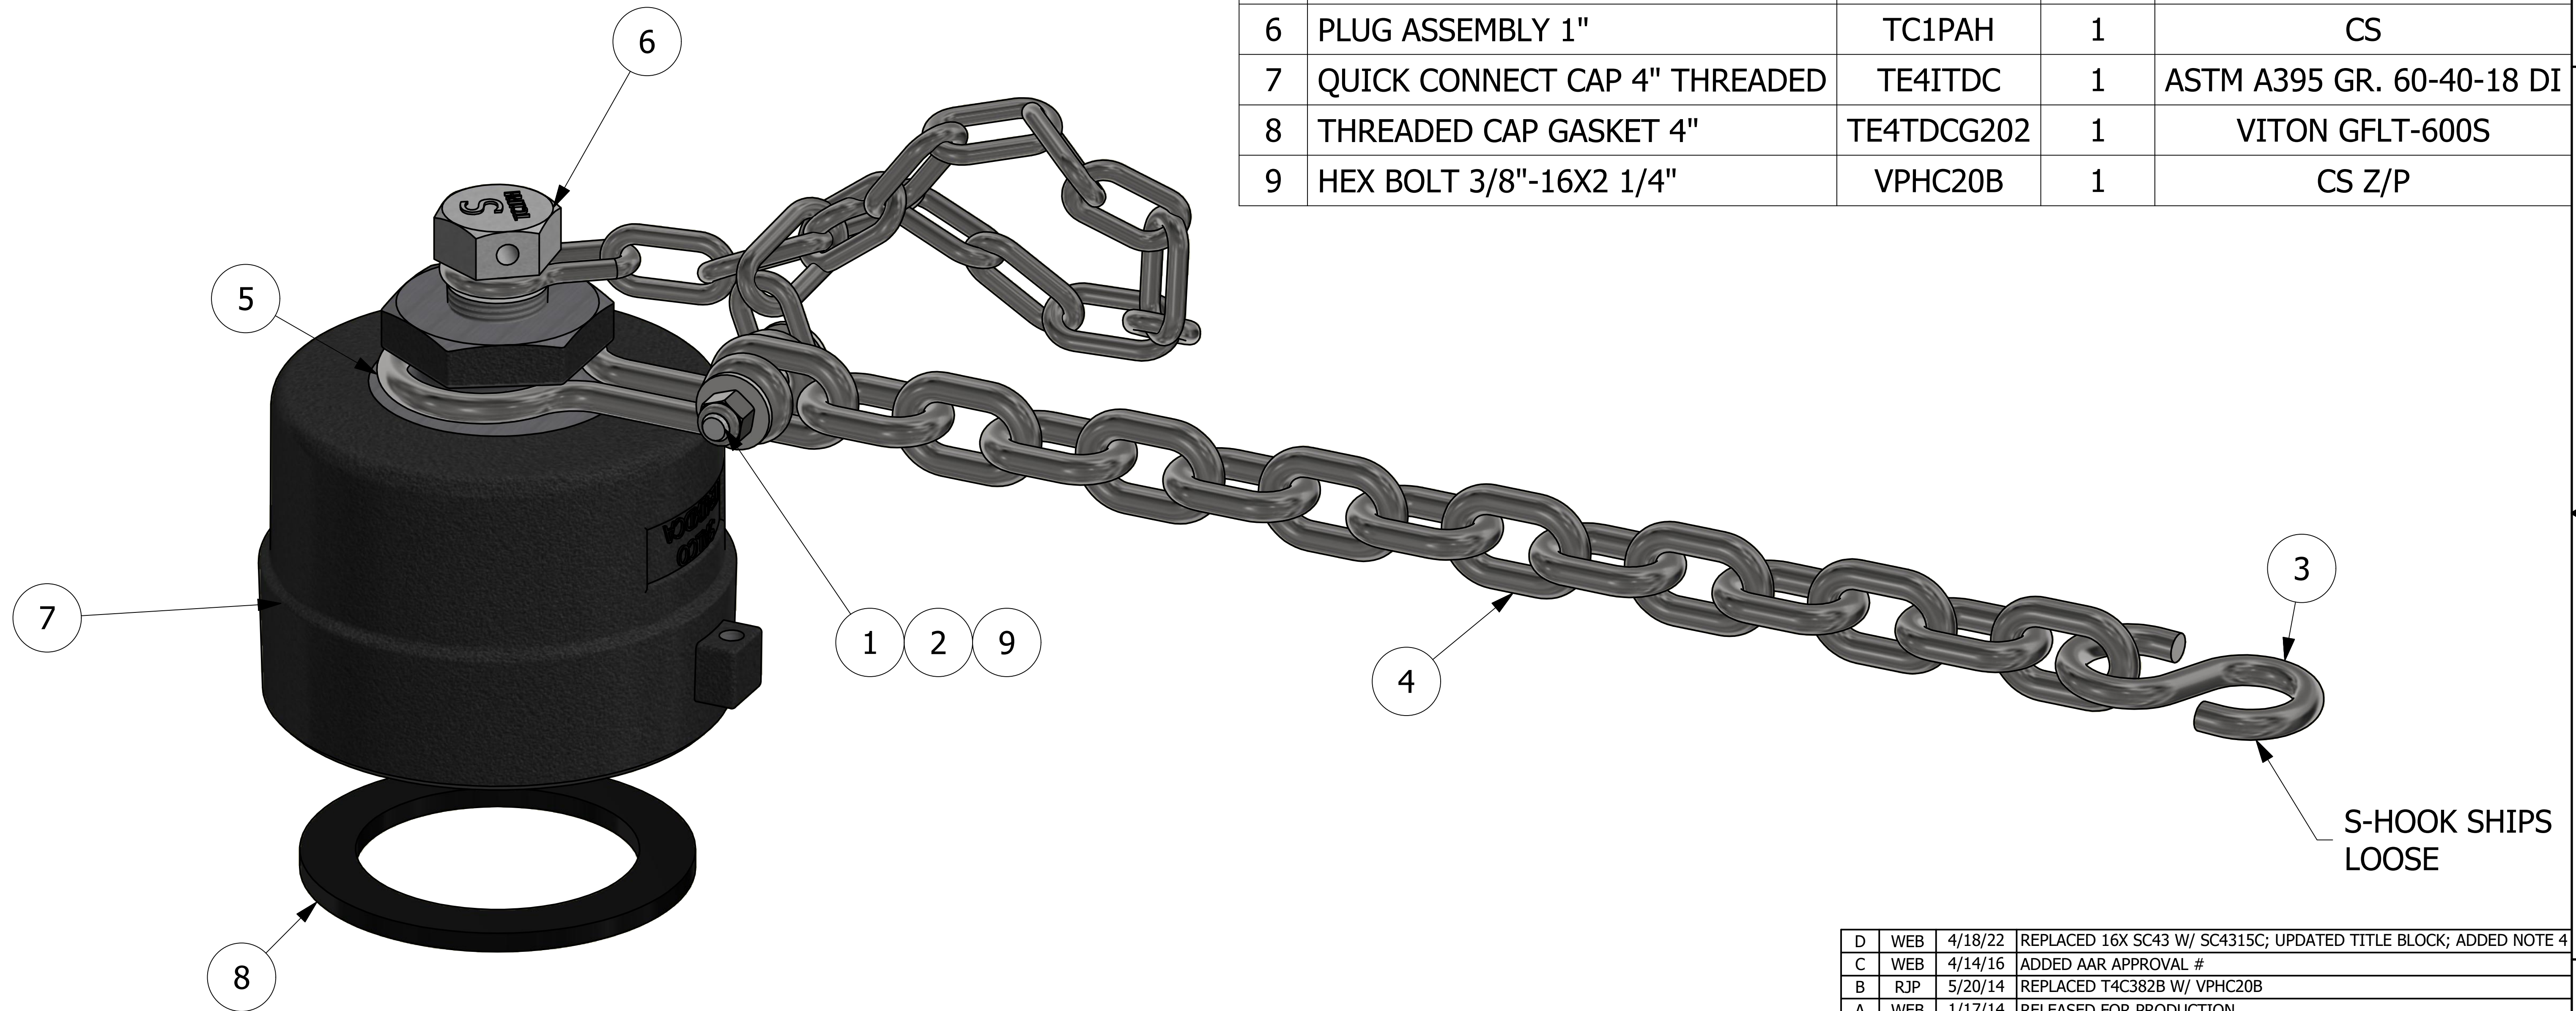

REV	BY	DATE	DESCRIPTION
D	WEB	4/18/22	REPLACED 16X SC43 W/ SC4315C; UPDATED TITLE BLOCK; ADDED NOTE 4
C	WEB	4/14/16	ADDED AAR APPROVAL #
B	RJP	5/20/14	REPLACED T4C382B W/ VPHC20B
A	WEB	1/17/14	RELEASED FOR PRODUCTION

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES	DRAWN BY:	WEB
FRACTIONAL: ±1/16	CHECKED BY:	CHL
X.XX: ±.03	PROTOTYPE DATE:	1/15/2014
X.XXX: ±.015	APPROVED FOR PRODUCTION BY:	WEB
ANGULAR: ±1°	PRODUCTION DATE:	1/17/2014
DEBURR ALL SHARP EDGES. ALL MACHINED SURFACES TO HAVE A 125 RMS FINISH UNLESS NOTED OTHERWISE.	SIZE:	D
THIRD ANGLE PROJECTION	DRAWING #:	38103

**SALCO PRODUCTS, INC.**

**QUICK CONNECT CAP 4" THREADED**

MATERIAL: **SEE BOM**

PROJECT #: **140114FR1** SHEET #: \_\_\_\_\_ SCALE: **1:1**

PART #: **TE4IDC202A**