
NOTES:

₽

- 1. THIS ASSEMBLY IS AAR AND DOT APPROVED.
- 2. THREADS ARE 5 1/4"-4 UN-2B.
- 3. AAR APPROVAL # E-149523
- 4. SPRAY WITH UDSA APPROVED WHITE MINERAL OIL OR VEGETABLE OIL AS A RUST INHIBITOR.

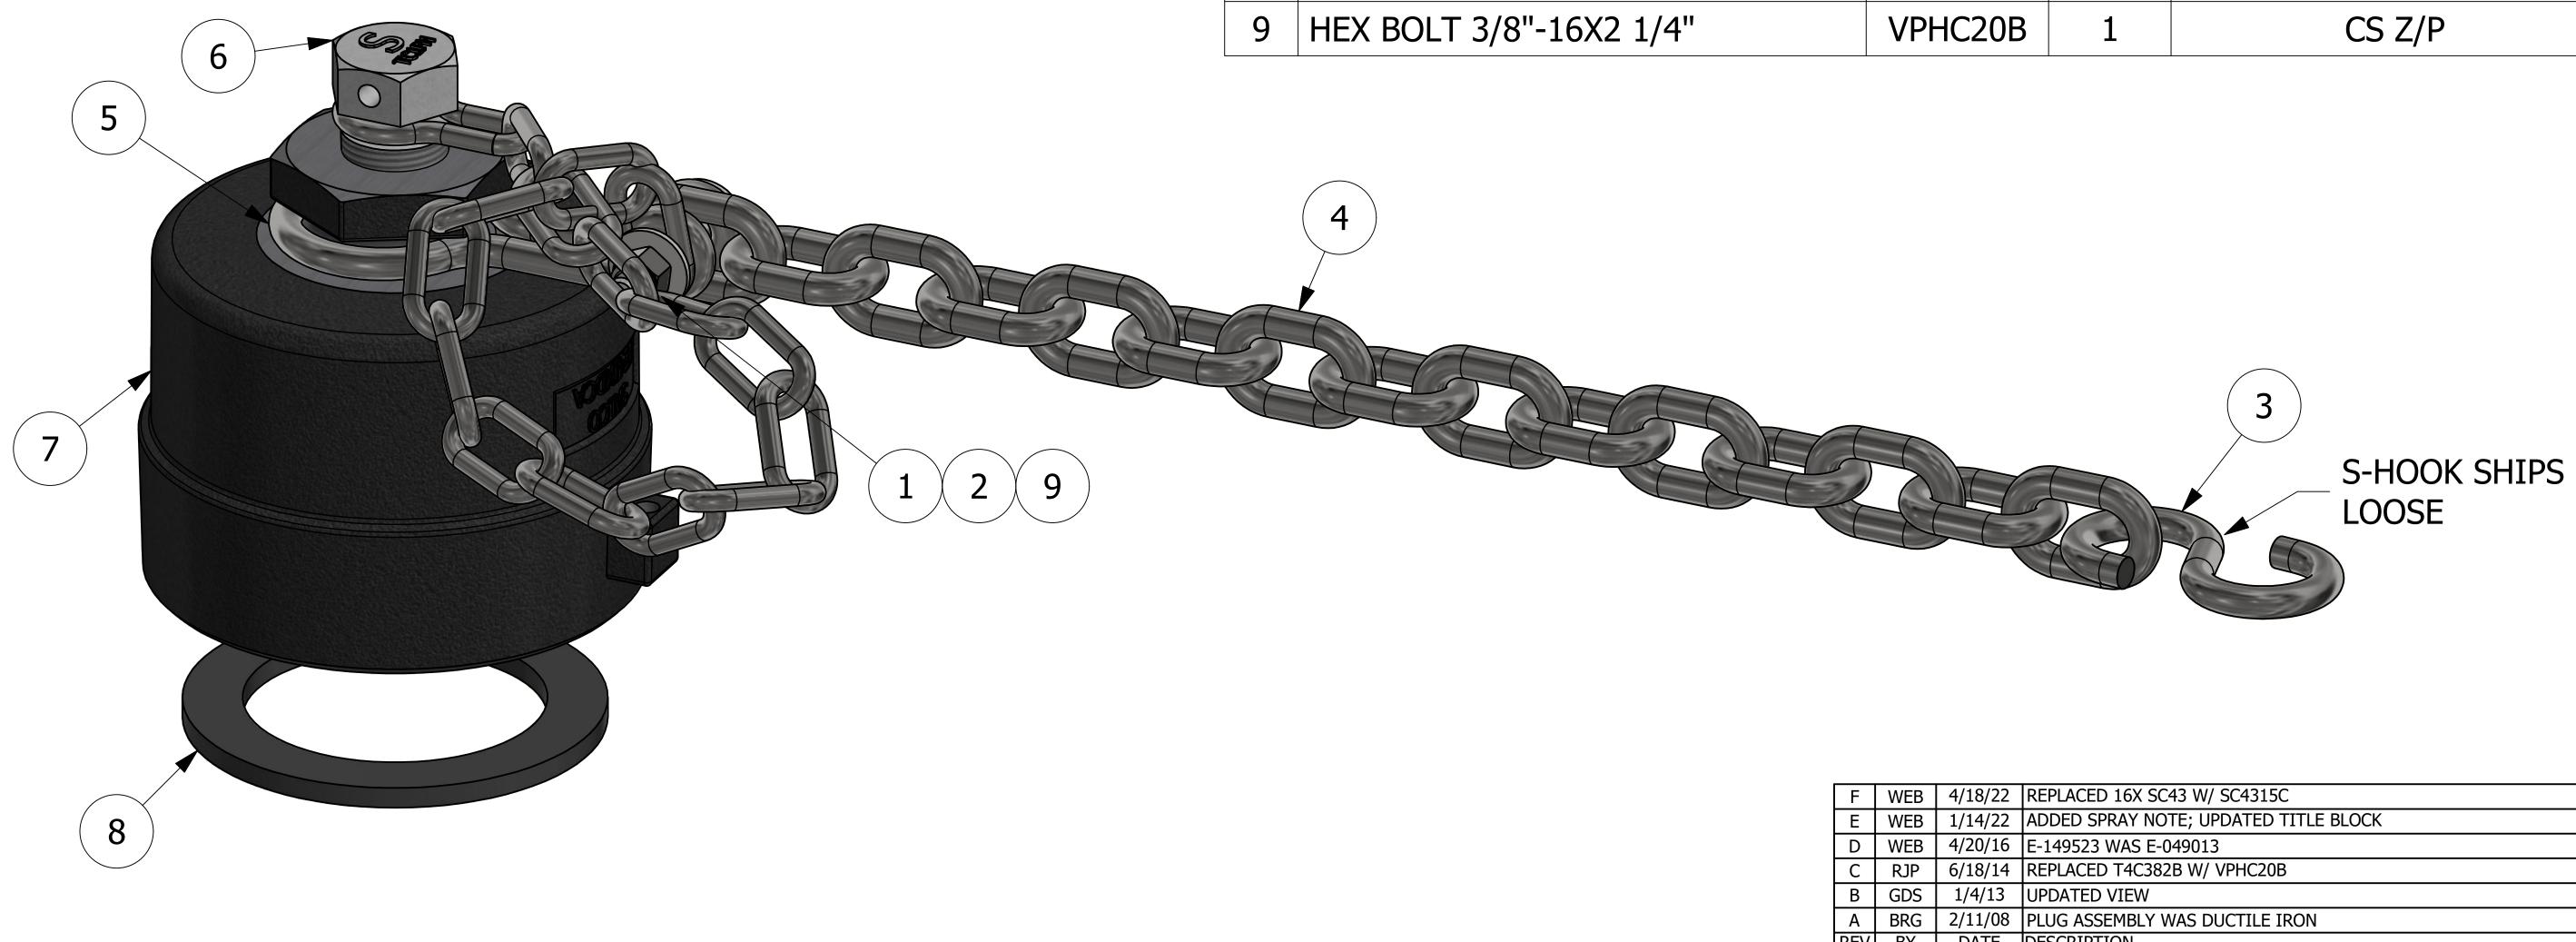

4

5		4 3	1	2	1
	NO.	PART NAME	PART#	REQ'D	MATERIAL
	1	HEX LOCK NUT 3/8"-16	EA111N	1	CS Z/P
	2	FLAT WASHER 3/8" USS	KL103FW	2	CS Z/P
	3	S-HOOK 3/8"X3 1/2"	SC38SH	1	CS Z/P
	4	CHAIN LINKS 3/8"X15	SC4315C	1	AISI 1008 CS
R	5	LOCK RING	SSTCLR	1	304 SS
	6	PLUG ASSEMBLY 1"	TC1PAH	1	CS
	7	QUICK CONNECT CAP 4" THREADED	TE4ITDC	1	ASTM A395 GR. 60-40-18 DI
	8	DUST CAP GASKET 4"	TE4TDCG3	1	BLACK EPDM SC
	9	HEX BOLT 3/8"-16X2 1/4"	VPHC20B	1	CS Z/P

				REV	BY	DATE	DE
UNLESS OTHERWISE SPECIFI DIMENSIONAL TOLERANCE		DRAWN BY:	CHL				6
FRACTIONAL: ±1/		CHECKED BY:	ACC		45		
X.XX: ±. X.XXX: ±.0	.03)15	PROTOTYPE DATE:	2/11/2003			CK CO	N
	=1°	APPROVED FOR PRODUCTION BY:	ACC				
DEBURR ALL SHARP EDGES ALL MACHINED SURFACES HAVE A 125 RMS FINISH	то	PRODUCTION DATE:	2/11/2003	PROJECT	<u>SE</u>	<u>E BOI</u>	M
UNLESS NOTED OTHERWIS THIRD ANGLE PROJECTION	SE.	SIZE:	D	PART #:			
		DRAWING #:	17659	T	E4	IDO	
4	Τ		3				

WEB	4/18/22	REPLACED 16X SC43 W/ SC4315C
WEB	1/14/22	ADDED SPRAY NOTE; UPDATED TITLE BLOCK
WEB	4/20/16	E-149523 WAS E-049013
RJP	6/18/14	REPLACED T4C382B W/ VPHC20B
GDS	1/4/13	UPDATED VIEW
BRG	2/11/08	PLUG ASSEMBLY WAS DUCTILE IRON
BY	DATE	DESCRIPTION
		S SALCO PRODUCTS, INC.

QUICK CONNECT CAP 4" THREADED

scale: 1:1

E4IDC3A

THIS PRINT, PROPERTY OF SALCO PRODUCTS INC, CONTAINS PROPRIETARY INFORMATION AND MUST NOT BE COPIED, REPRODUCED, OR USED DETRIMENTALLY TO OUR INTEREST.