




NO.	PART NAME	PART#	REQ'D	MATERIAL
1	QUICK CONNECT ADAPTER 4" FLANGED	TE4ITF	1	DUCTILE IRON
2	QUICK CONNECT CAP 4" THREADED	TE4IDC12A	1	DUCTILE IRON

- NOTES:
- 1. APPROXIMATE HEIGHT: 8"
 - 2. FLANGE THICKNESS: 3/4"
 - 3. FITS 4" JAMESBURY BALL VALVE (AZFRC) - 9.00 B.C.
 - 4. AAR APPROVAL # E-149523.
 - 5. THIS ASSEMBLY IS AAR AND DOT APPROVED.
 - 6. QUICK DISCONNECT MEETS A-A-59326D.
 - 7. CAP GASKET IS BLACK VITON® GF-600S.

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCES
FRACTIONAL: ±1/16
X.XX: ±.03
X.XXX: ±.015
ANGULAR: ±1°
DEBURR ALL SHARP EDGES.
ALL MACHINED SURFACES TO
HAVE A 125 RMS FINISH
UNLESS NOTED OTHERWISE.

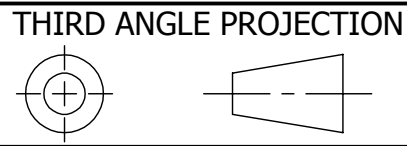

DRAWN BY:	RJP
CHECKED BY:	CHL
PROTOTYPE BY:	RJP
PROTOTYPE DATE:	6/19/2014
APPROVED FOR PRODUCTION BY:	WEB
PRODUCTION DATE:	2/24/2015

A	WEB	2-24-15	RELEASED FOR PRODUCTION
REV	BY	DATE	DESCRIPTION
SALCO PRODUCTS, INC.			
PART NAME: QUICK CONNECT 4" FLANGED			
MATERIAL: SEE BOM/NOTE			
PROJECT #:	110524	SHEET #:	1 OF 1
DRAWING #:	D39278	PART #:	TE4ITUF12A
		SCALE:	3:4