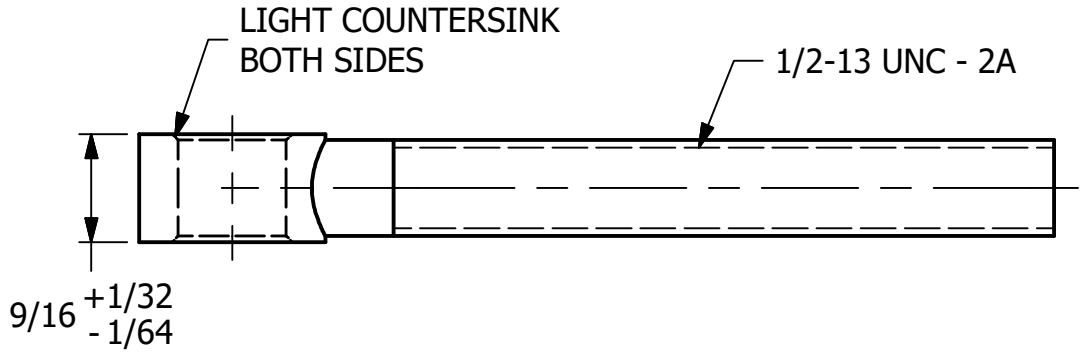

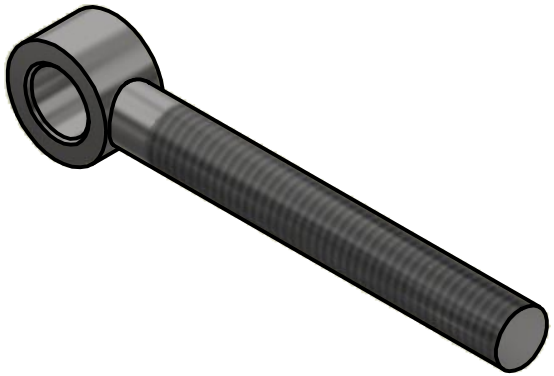

ISOMETRIC VIEW

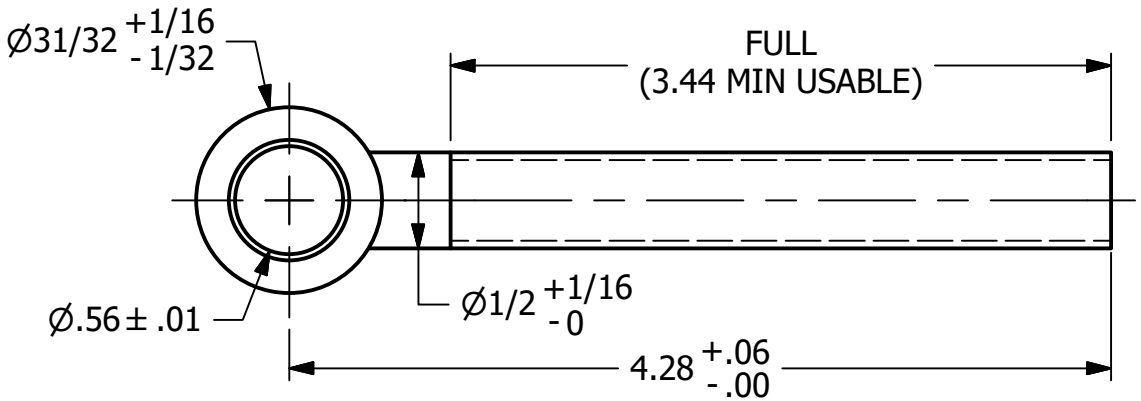

REV	BY	DATE	DESCRIPTION
D	CHL	6/30/21	DIMS 9/16 +1/32/-1/64, Ø31/32 +1/16/-1/32, 4.28 +.06/-.00, Ø.56 ±.01 & 3.44 MIN WERE .56, Ø.94, 4 9/32, Ø.56, 3.50 MIN, ADDED DIM Ø1/2 +1/16/-0, MATERIAL WAS 304 SS
C	RJP	9/12/16	ADDED "2A" TO THREAD, UPDATED TO CURRENT STANDARDS
B	CLH	9/29/96	REVISED TOLERANCES
A	ACC	8/14/95	ADDED PART #, CHANGED MATERIAL

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES
FRACTIONAL: ±1/16
X.XX: ±.03
X.XXX: ±.015
ANGULAR: ±1°
DEBURR ALL SHARP EDGES. ALL MACHINED SURFACES TO HAVE A 125 RMS FINISH UNLESS NOTED OTHERWISE.
THIRD ANGLE PROJECTION

DRAWN BY:	JWO
CHECKED BY:	
PROTOTYPE DATE:	6/12/1995
APPROVED FOR PRODUCTION BY:	ACC
PRODUCTION DATE:	8/14/1995
SIZE:	A
DRAWING #:	5984

SALCO PRODUCTS, INC.

PART NAME: EYEBOLT 1/2"X4 9/32"

MATERIAL: ASTM A193 GRADE B8/UNS S30400

PROJECT #: | SHEET #: 1 OF 1 | SCALE: 1:1

PART #: YSD4SB

THIS PRINT, PROPERTY OF SALCO PRODUCTS INC, CONTAINS PROPRIETARY INFORMATION AND MUST NOT BE COPIED, REPRODUCED, OR USED DETRIMENTALLY TO OUR INTEREST.